


Membrana[®] GOLD



It doesn't require fiber mesh

Resistant to any stress

Ideal for underfloor systems



Membrana[®]
GOLD
FIBER-REINFORCED ELASTIC LIQUID SHEATH



CIMAR PRODUZIONE surl
Establishment: via Mecio Gracco n°8 - 84131 - Salerno (Italy)
Phone and fax: + 39 (0)89 302418 www.cimarproduzione.com info@cimarproduzione.com



CE EN 1504-2 exposed system
EN 14891 underfloor system



LIQUID WATERPROOFING

Membrana[®] GOLD



It does not require protective coatings

It constitutes a monolithic system

It resists to water stagnation

Provides flexibility down to -20°C



**for system
over 400m²*
by UNIPOL-SAI**



EXPOSED WATERPROOFING

- Walkable floor and wall coverings
- Terraces and balconies

Before application, clean the surface by removing dust, loose parts and oils. In case of power washer cleaning, wait for the surface to be completely dry. The surfaces must be pre-treated with Membrana Gold (fiber-free version) diluted 35% with water, with consumption of 300 gr/m². Then apply two coats of Membrana Gold FR with consumption of 1 Kg/m² each; it is essential to cross the two coats of product.

Membrana Gold FR on walkable terrace

UNDERFLOOR APPLICATIONS

- To waterproof: old floors, cladding, bathrooms and showers

Before application on old floors or walls, first check the condition of the joints, remove and restore the floor coverings or parts of the floor which require replacement. Product consumption will be 2 kg/m² in two crossed coats. Before applying Membrana Gold FR on a cementitious substrate pre-treat with Membrana Gold (fiber-free version) diluted 35% with water, consumption 300 gr/m²; On tiles, use Ultragrip as primer.



Glue application on Membrana Gold FR


Warnings

- Apply at temperatures between +5°C and +35°C.
- Avoid direct application on damp surfaces**, in presence of rising damp or on attached screeds.
- For applications on new cementitious substrates, await its complete drying process.
- Set up steam exhalers, if necessary.
- The thickness of the individual coats of the products must not exceed 1mm.
- Once the application is finished, any residual stickiness can be removed with cement dusting.
- The layers of Membrana Gold FR, if not completely dried, are damaged by the action of rain, dew and fog.

** Our use Cimar anti-dump primer, La Quinta Stagione.


Standard application

1. Membrana Gold diluted to 35% - 300 gr/m²
2. Membrana Gold FR - 1 Kg/m²
3. Membrana Gold FR - 1 Kg/m²

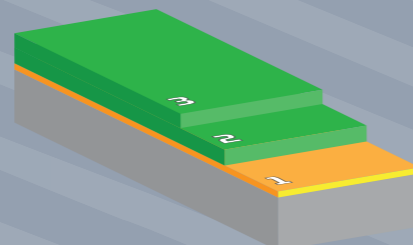


Application on tiles

1. Ultragrip clinging agent - 300 gr/m²
2. Membrana Gold FR - 1 Kg/m²
3. Membrana Gold FR - 1 Kg/m²

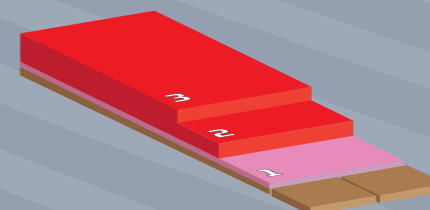

Underfloor application

1. Membrana Gold diluted to 35% - 300 gr/m²
2. Membrana Gold FR - 1 Kg/m²
3. Membrana Gold FR - 1 Kg/m²
4. Super K, glue for tiles 5 Kg/m²

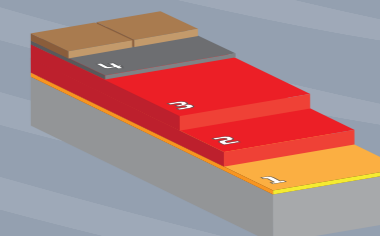

*The insurance is free of charge for all works extending more than 400 m²
Apply with a rubber or steel spatula
Consult the technical datasheet, before application



Colours: